



Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN
30-60MHZ -14.0dB MIN
60-80MHZ -10.0dB MIN

Cross Talk: 1-30MHZ -40.0dB MIN
30-60MHZ -35.0dB MIN
60-80MHZ -30.0dB MIN

CMR: 1-100MHZ -35.0dB MIN

Hi-Pot: 1500v AC 6S 1mA

Turn Ratio: 1CT:1CT+/-3%


OCL:350uH MIN @ 100KHZ 100mV 8mA DC

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact are

Housing Material: PBT Black


Operating temperature range:0°C to +70°C

Schematics

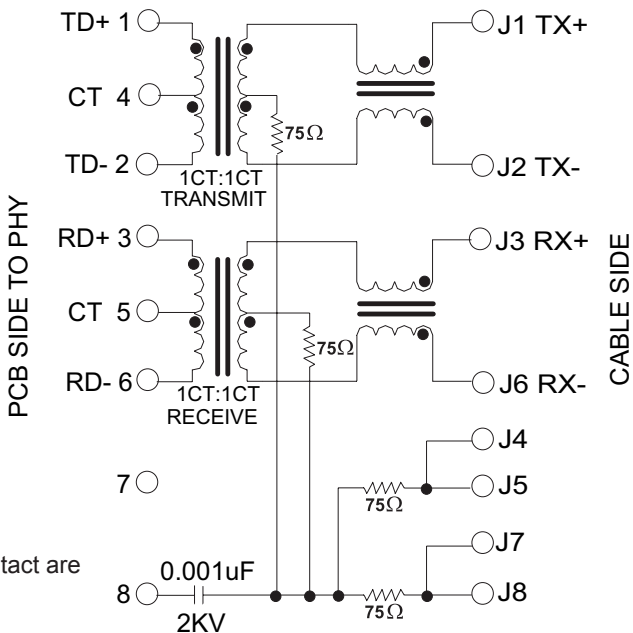

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Mechanical

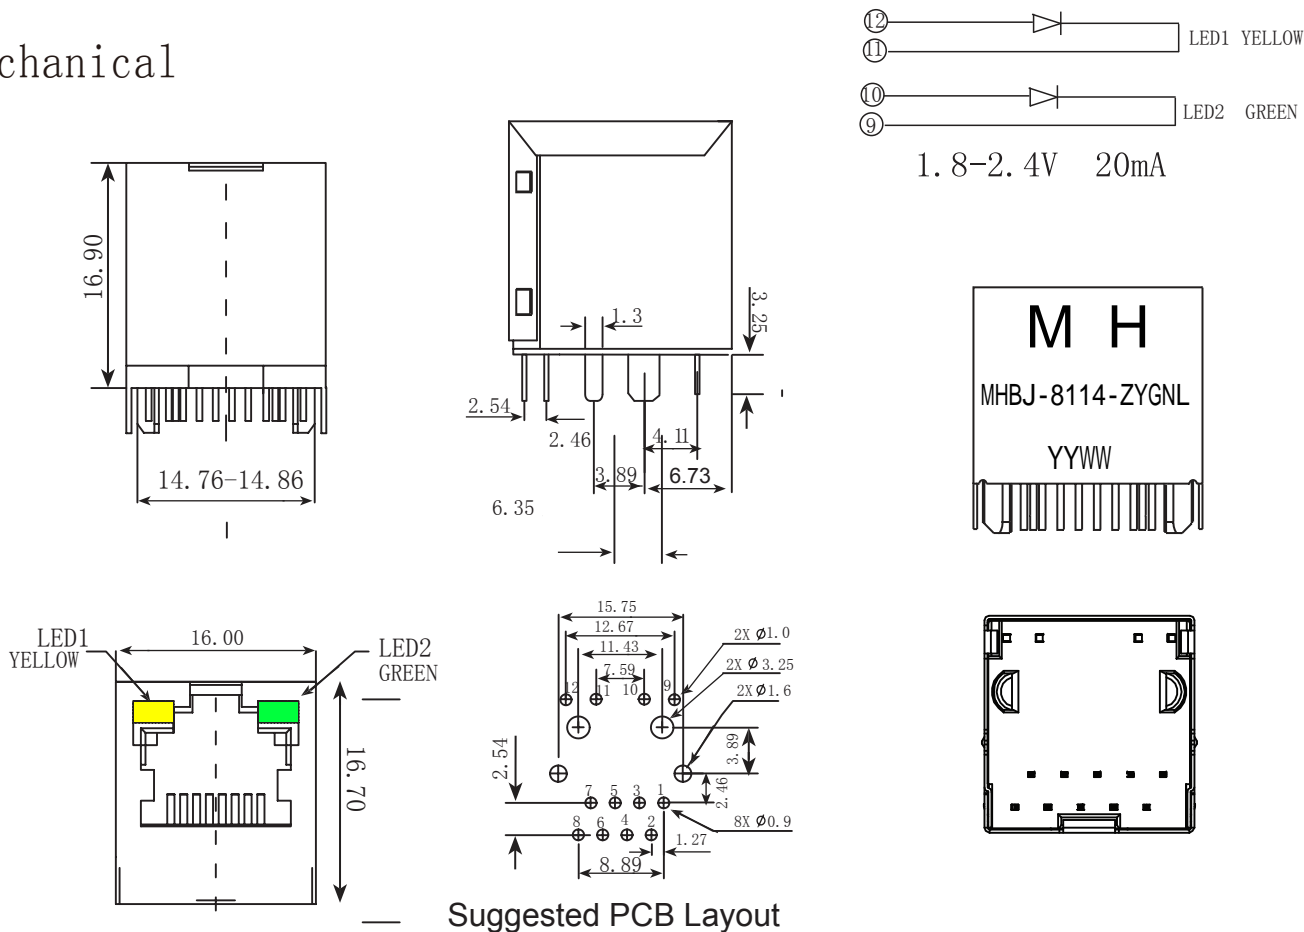

正负公差0.25 按照样品实际尺寸为准

电话(tel) 0755-84679842		Shenzhen MingHui Electronic Co.,Ltd						
http:// www.minghuiy.com								
单位(units)	MM	设计(draw)	邓建伟	材料 (mt' l)		图名(name)	10/100BASE-LED 1x1Tab-180 ° RJ45	
比例(scale)	1 : 1	审核(ch' k)	邓荣进	UNIT:mm	.xx +/-0.25, xxx +/- -0.13			
版次(rev.)	A / 1	核准(app' d)	邓荣进	HOUSING	PBT	料号(Part number)	MHBj-8114-ZYGNL	
视图(view)		日期(date)	2008.08.12	PIN	Qsn6.5-0.1	图档(File Name)	E:\工程图	